


LED SCREEN SPECIFICATION

TECHNICAL SHEET

Item: Outdoor P10 SMD , Back Maintenance

Module Specs

Model	C-oSMD-P10
Pixel Pitch	10 mm
LEDs Type	SMD3535
LEDs Configuration	3in1
Size	160(L)*160(H) mm
Resolution	16(L) * 16(H) pixel
Driving Mode	1/4 Scan
Application	Outdoor

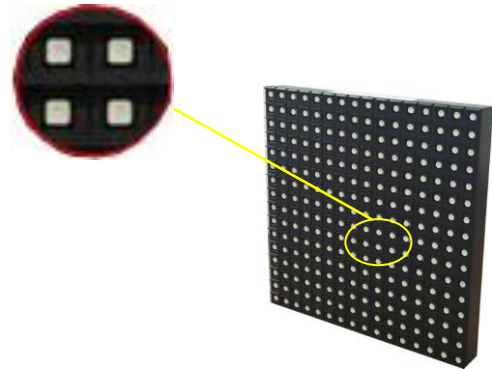


Cabinet Specs

Cabinet Size (WxH)	1280 x960 / mm
Depth	180mm
Casing Material	Iron (Steel)
Maintenance	Back Service
Wiring	Internal / External
Weight	62 kg





Screen Specs

Pixel Density	10,000 pixel / m2
Brightness	≥5200 cd/m2
Drive Method	1/4 Scan
Power Consumption (W/m2)	Max: 980 / Ave: 490
View Angle	140° / 140°
Protection Level	IP65 front , IP54 back
Control System	Nova
Control Method	Online
Max control distance:	60 meters
Communication Cable	UTP Category 5
Signal Input (Desktop)	DVI
Signal Input (Laptop)	HDMI
Temperature operating	-20°C - +50°C
Humidity operating	25% - 95%RH
Package	Plywood case

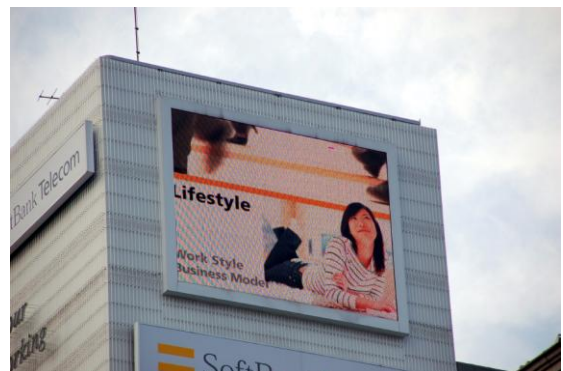


Control System Diagram

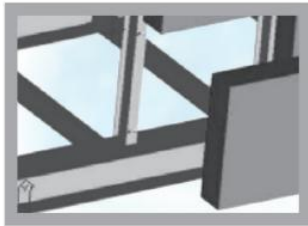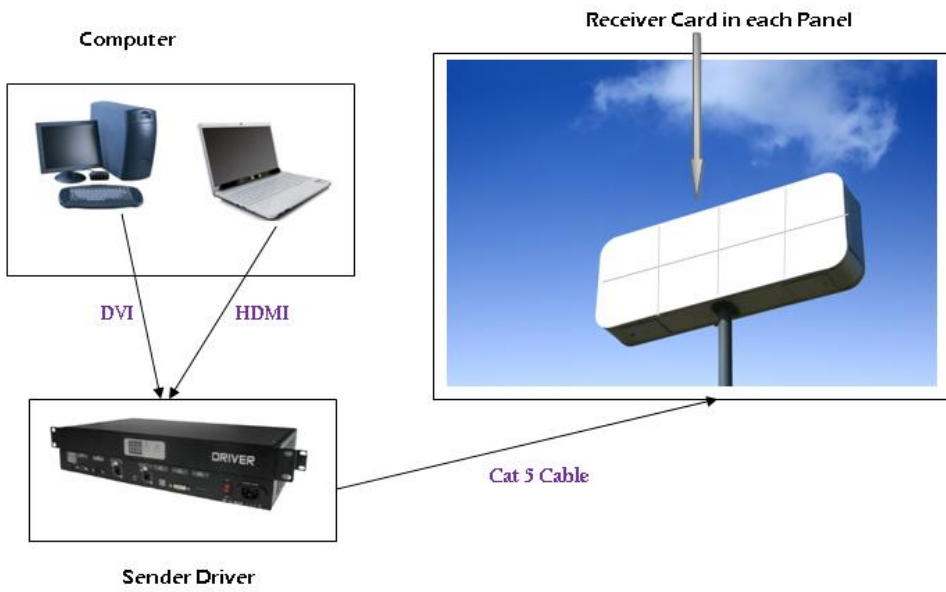

1. Put cabinet on the structure



2. Assemble cabinets to steel frame

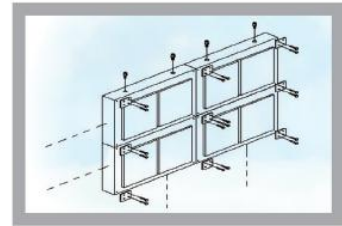

3. Assemble cabinets

Assembly Order

